


Ratchet Puller | Ratchet Grip



Move It-Holland ratchet puller is designed for conductor and cable tensioning applications within the electricity distribution and telecommunication industry.


Features

- » Compact design, light weight and easily carried.
- » Fast advance mechanism.
- » Equipped with automatic mechanical brake and change pawl.
- » More built-in safety factors than other brands.
- » Easily field repairable and inexpensive for maintenance.
- » Solid ductile and malleable iron construction.
- » Integrated gear, more wear-resistant for use.
- » Integral type die-casting sheave for smooth operation.
- » Yellow zinc-plated finish protects components from rust and corrosion.
- » 360° handle movement.

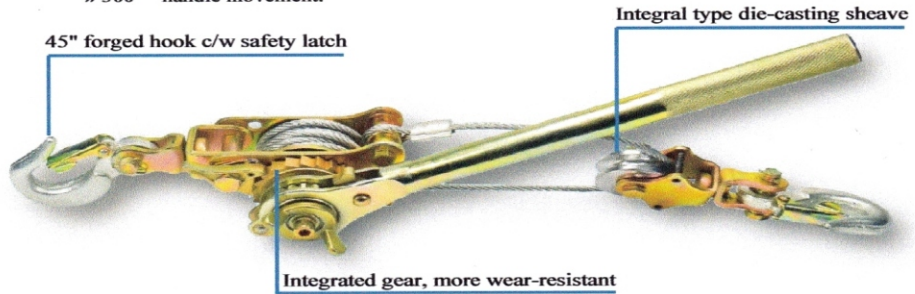

Pulling Capacity (Ton)	Lever Length (mm)	Max. Tension Length (mm)	Min. Tension Length (mm)	Numbers of Hooks	Wire Rope (mm x mtr)
0.5	330	1370	360	2	5 x 1.2
1	330	1230	410	2	5 x 2.2
1.5	430	1250	450	2	6 x 2.2
2	430	1870	480	2	6 x 3.2

Wire Rope & Cable Grip

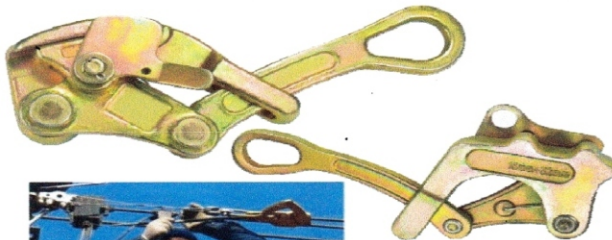

Move It-Holland wire grip can be used with ratchet puller, to grip, pull and tension wire rope, cable and metal rods, etc.

Features

- » Light weight and compact design, easy for carrying.
- » Made from drop forged alloy steel for durability and toughness.
- » Parallel jaws provide firm grip without damaging wire rope/cable.
- » Guide prevents the grip from dropping off wire rope/cable and allows instant release.
- » Grips open easily and release instantly to quick insert or remove wire rope/cable.
- » Yellow zinc-plated finish protects components from rust and corrosion.
- » Large handle eye opening accepts standard hooks and easily attached to tackle blocks or strap pullers.



W.L.L. (Ton)	Grip Range (mm)	Package Size (mm)	Q'ty/CTN (pcs)	N.W. (kg)
0.5	1-10	185x170x130	10	0.4
1	2.6-15	240x210x140	10	0.8
2	4-22	270x260x110	5	1.5
3	16-32	370x350x180	5	2.3

HAND PULLER



Model	MT-1000	MT-2000	MT-3000	MT-4000
Maximum pulling capacity (ton)	(double line)	1	2	3
	(single line)	0.5	1	1.5
Steel cable diameter (mm)	Φ4.5	Φ4.8	Φ5	Φ5.5
Steel cable length (m)	1.8	3	3	3
Effective towing distance (m)	0.7	1.2	1.2	1.2
Leverage	15:1	15:1	15:1	15:1
Q'ty/ Carton (pieces)	10	6	6	4
Package size (cm)	56x42x22	61x26x22	65x28x26	71x21x29
G.W./N.W. (kg)	22/20	17/15	22/20	22/20
Remark	single gear, 2 hooks	double gear, 2 hooks	double gear, 2 hooks	double gear, 2 hooks